


Installation of the Stainless steel Balcony channel with a hydraulic cross-section 4 3/8"(110mm) into a tile/concrete

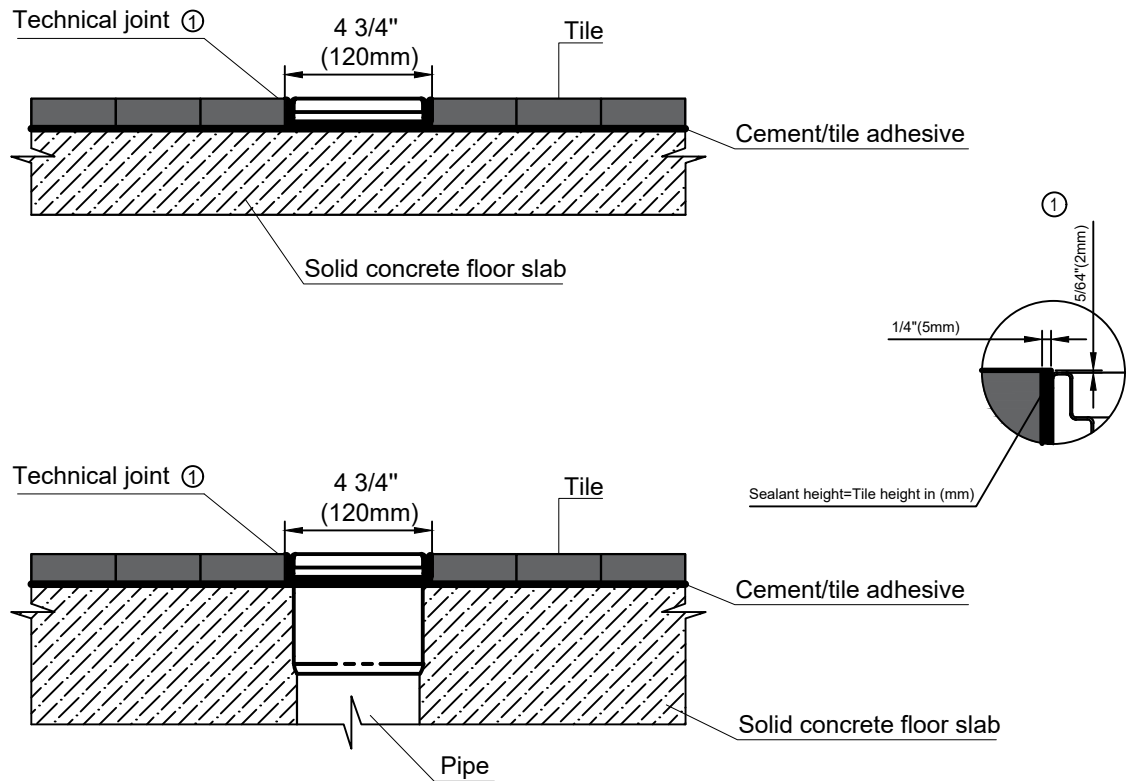

NOTES

1. Drainage system should be installed in accordance with the manufacturer's instructions and recommendations.
2. The manufacturer's technical consultation may be required to determine the correct load class.
3. The scheme of installation of the drainage system is not normative, it is more of a recommendatory nature.
4. The finished level of the concrete clamp (or adjacent coating) should be 5/64 " (2 mm) above the top of the channel edge.
5. Technological seam can be made with a special polyurethane sealant, as shown in scheme 1.
6. Follow the updates to the instructions and recommendations in the website Vodaland.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR:
ANGULAR:

FINISH:

DEBURR AND
BREAK SHARP
EDGES

DO NOT SCALE DRAWING

REVISION



	NAME	SIGNATURE	DATE		
DRAWN					
CHK'D					
CHK'D					
APP'VD					

MATERIAL:

Stainless steel

TITLE:

Stainless Steel Balcony channel
Tile/Concrete

ARTICLE: