
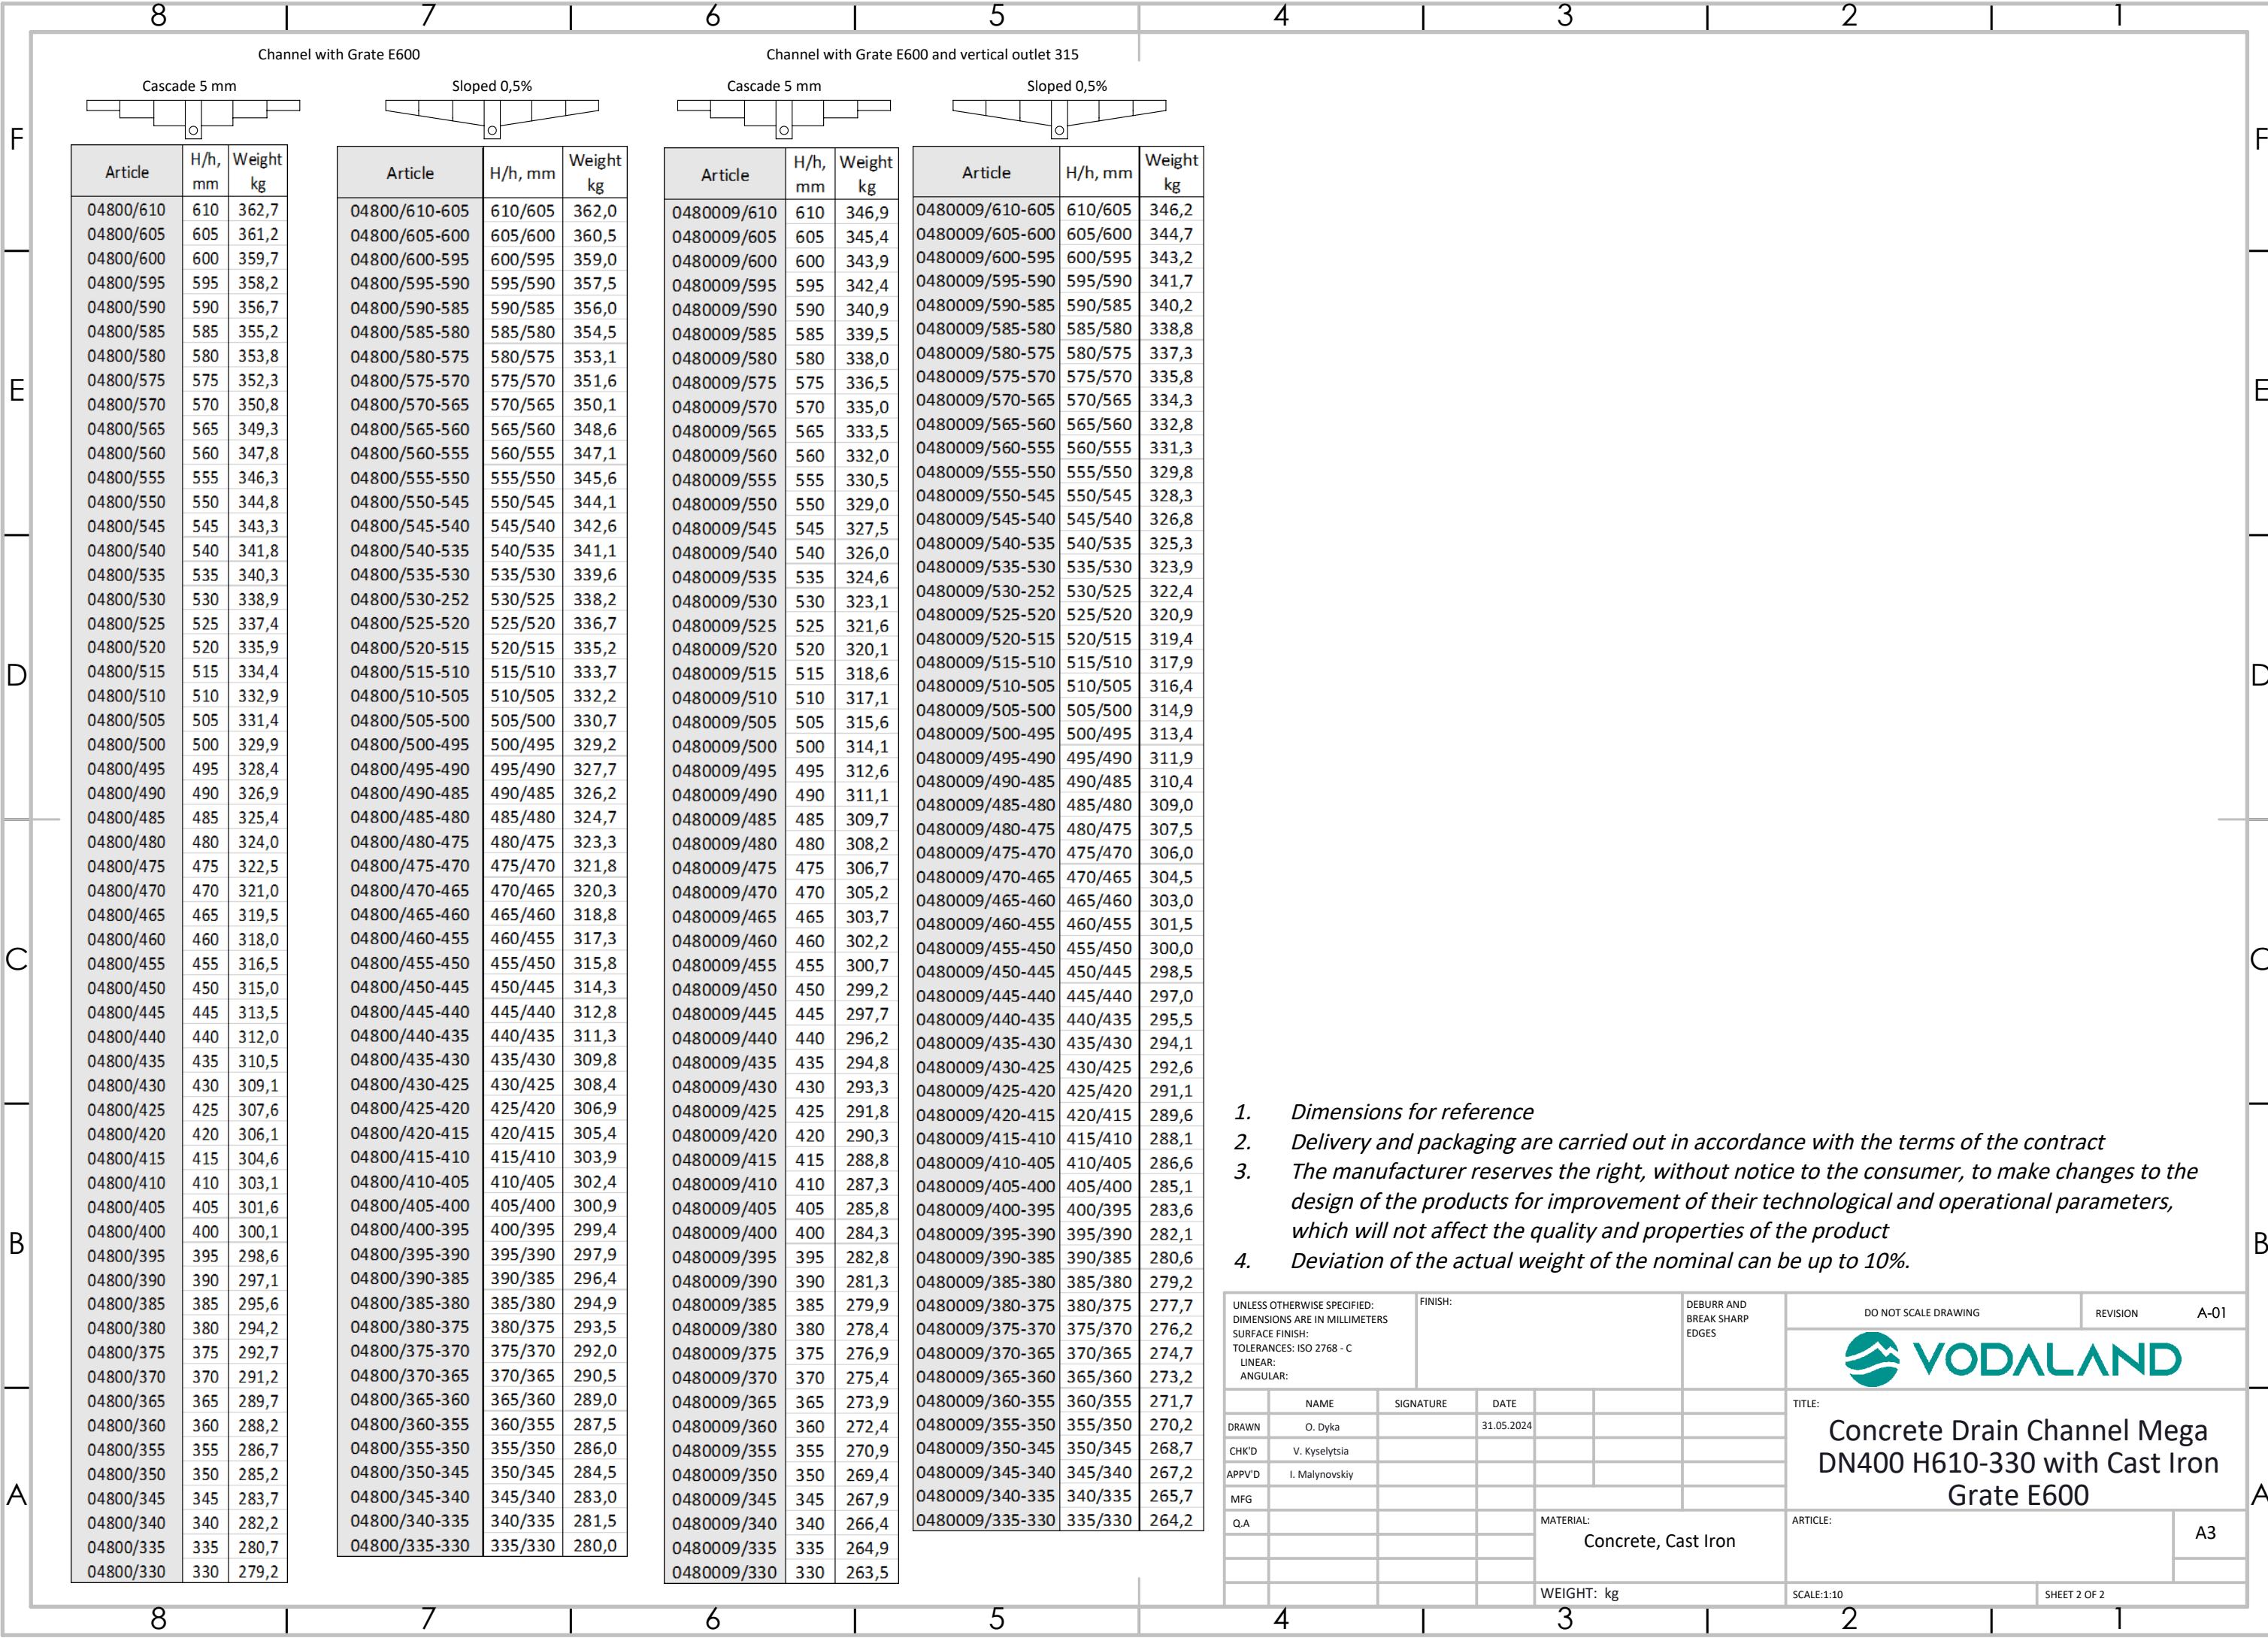


1. Dimensions for reference
2. Delivery and packaging are carried out in accordance with the terms of the contract
3. The manufacturer reserves the right, without notice to the consumer, to make changes to the design of the products for improvement of their technological and operational parameters, which will not affect the quality and properties of the product
4. Deviation of the actual weight of the nominal can be up to 10%.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: ISO 2768 - C LINEAR: ANGULAR:				FINISH:		DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION		A-01																																																																																	
								<div>VODALAND</div>																																																																																					
<table><tr><td></td><td>NAME</td><td>SIGNATURE</td><td>DATE</td><td></td><td></td><td></td><td></td></tr><tr><td>DRAWN</td><td>O. Dyka</td><td></td><td>31.05.2024</td><td></td><td></td><td></td><td></td></tr><tr><td>CHK'D</td><td>V. Kyselytsia</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>APPV'D</td><td>I. Malynovskiy</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>MFG</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Q.A</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>									NAME	SIGNATURE	DATE					DRAWN	O. Dyka		31.05.2024					CHK'D	V. Kyselytsia							APPV'D	I. Malynovskiy							MFG								Q.A																																								TITLE: Concrete Drain Channel Mega DN400 H610-330 with Cast Iron Grate E600					
									NAME	SIGNATURE	DATE																																																																																		
								DRAWN	O. Dyka		31.05.2024																																																																																		
								CHK'D	V. Kyselytsia																																																																																				
								APPV'D	I. Malynovskiy																																																																																				
MFG																																																																																													
Q.A																																																																																													
<table><tr><td colspan="4">MATERIAL:</td><td colspan="4">ARTICLE:</td><td colspan="2">A3</td></tr><tr><td colspan="4">Concrete, Cast Iron</td><td colspan="4"></td><td colspan="2"></td></tr><tr><td colspan="4"></td><td colspan="4"></td><td colspan="2"></td></tr></table>								MATERIAL:				ARTICLE:				A3		Concrete, Cast Iron																																																																											
								MATERIAL:				ARTICLE:				A3																																																																													
								Concrete, Cast Iron																																																																																					
								SCALE:1:7				SHEET 1 OF 2																																																																																	
WEIGHT: kg																																																																																													



Article	H/h, mm	Weight kg
04800/610	610	362,7
04800/605	605	361,2
04800/600	600	359,7
04800/595	595	358,2
04800/590	590	356,7
04800/585	585	355,2
04800/580	580	353,8
04800/575	575	352,3
04800/570	570	350,8
04800/565	565	349,3
04800/560	560	347,8
04800/555	555	346,3
04800/550	550	344,8
04800/545	545	343,3
04800/540	540	341,8
04800/535	535	340,3
04800/530	530	338,9
04800/525	525	337,4
04800/520	520	335,9
04800/515	515	334,4
04800/510	510	332,9
04800/505	505	331,4
04800/500	500	329,9
04800/495	495	328,4
04800/490	490	326,9
04800/485	485	325,4
04800/480	480	324,0
04800/475	475	322,5
04800/470	470	321,0
04800/465	465	319,5
04800/460	460	318,0
04800/455	455	316,5
04800/450	450	315,0
04800/445	445	313,5
04800/440	440	312,0
04800/435	435	310,5
04800/430	430	309,1
04800/425	425	307,6
04800/420	420	306,1
04800/415	415	304,6
04800/410	410	303,1
04800/405	405	301,6
04800/400	400	300,1
04800/395	395	298,6
04800/390	390	297,1
04800/385	385	295,6
04800/380	380	294,2
04800/375	375	292,7
04800/370	370	291,2
04800/365	365	289,7
04800/360	360	288,2
04800/355	355	286,7
04800/350	350	285,2
04800/345	345	283,7
04800/340	340	282,2
04800/335	335	280,7
04800/330	330	279,2

Article	H/h, mm	Weight kg
04800/610-605	610/605	362,0
04800/605-600	605/600	360,5
04800/600-595	600/595	359,0
04800/595-590	595/590	357,5
04800/590-585	590/585	356,0
04800/585-580	585/580	354,5
04800/580-575	580/575	353,1
04800/575-570	575/570	351,6
04800/570-565	570/565	350,1
04800/565-560	565/560	348,6
04800/560-555	560/555	347,1
04800/555-550	555/550	345,6
04800/550-545	550/545	344,1
04800/545-540	545/540	342,6
04800/540-535	540/535	341,1
04800/535-530	535/530	339,6
04800/530-525	530/525	338,2
04800/525-520	525/520	336,7
04800/520-515	520/515	335,2
04800/515-510	515/510	333,7
04800/510-505	510/505	332,2
04800/505-500	505/500	330,7
04800/500-495	500/495	329,2
04800/495-490	495/490	327,7
04800/490-485	490/485	326,2
04800/485-480	485/480	324,7
04800/480-475	480/475	323,3
04800/475-470	475/470	321,8
04800/470-465	470/465	320,3
04800/465-460	465/460	318,8
04800/460-455	460/455	317,3
04800/455-450	455/450	315,8
04800/450-445	450/445	314,3
04800/445-440	445/440	312,8
04800/440-435	440/435	311,3
04800/435-430	435/430	309,8
04800/430-425	430/425	308,4
04800/425-420	425/420	306,9
04800/420-415	420/415	305,4
04800/415-410	415/410	303,9
04800/410-405	410/405	302,4
04800/405-400	405/400	300,9
04800/400-395	400/395	299,4
04800/395-390	395/390	297,9
04800/390-385	390/385	296,4
04800/385-380	385/380	294,9
04800/380-375	380/375	293,5
04800/375-370	375/370	292,0
04800/370-365	370/365	290,5
04800/365-360	365/360	289,0
04800/360-355	360/355	287,5
04800/355-350	355/350	286,0
04800/350-345	350/345	284,5
04800/345-340	345/340	283,0
04800/340-335	340/335	281,5
04800/335-330	335/330	280,0

Article	H/h, mm	Weight kg
0480009/610	610	346,9
0480009/605	605	345,4
0480009/600	600	343,9
0480009/595	595	342,4
0480009/590	590	340,9
0480009/585	585	339,5
0480009/580	580	338,0
0480009/575	575	336,5
0480009/570	570	335,0
0480009/565	565	333,5
0480009/560	560	332,0
0480009/555	555	330,5
0480009/550	550	329,0
0480009/545	545	327,5
0480009/540	540	326,0
0480009/535	535	324,6
0480009/530	530	323,1
0480009/525	525	321,6
0480009/520	520	320,1
0480009/515	515	318,6
0480009/510	510	317,1
0480009/505	505	315,6
0480009/500	500	314,1
0480009/495	495	312,6
0480009/490	490	311,1
0480009/485	485	309,7
0480009/480	480	308,2
0480009/475	475	306,7
0480009/470	470	305,2
0480009/465	465	303,7
0480009/460	460	302,2
0480009/455	455	300,7
0480009/450	450	299,2
0480009/445	445	297,7
0480009/440	440	296,2
0480009/435	435	294,8
0480009/430	430	293,3
0480009/425	425	291,8
0480009/420	420	290,3
0480009/415	415	288,8
0480009/410	410	287,3
0480009/405	405	285,8
0480009/400	400	284,3
0480009/395	395	282,8
0480009/390	390	281,3
0480009/385	385	279,9
0480009/380	380	278,4
0480009/375	375	276,9
0480009/370	370	275,4
0480009/365	365	273,9
0480009/360	360	272,4
0480009/355	355	270,9
0480009/350	350	269,4
0480009/345	345	267,9
0480009/340	340	266,4
0480009/335	335	264,9
0480009/330	330	263,5

Article	H/h, mm	Weight kg
0480009/610-605	610/605	346,2
0480009/605-600	605/600	344,7
0480009/600-595	600/595	343,2
0480009/595-590	595/590	341,7
0480009/590-585	590/585	340,2
0480009/585-580	585/580	338,8
0480009/580-575	580/575	337,3
0480009/575-570	575/570	335,8
0480009/570-565	570/565	334,3
0480009/565-560	565/560	332,8
0480009/560-555	560/555	331,3
0480009/555-550	555/550	329,8
0480009/550-545	550/545	328,3
0480009/545-540	545/540	326,8
0480009/540-535	540/535	325,3
0480009/535-530	535/530	323,9
0480009/530-525	530/525	322,4
0480009/525-520	525/520	320,9
0480009/520-515	520/515	319,4
0480009/515-510	515/510	317,9
0480009/510-505	510/505	316,4
0480009/505-500	505/500	314,9
0480009/500-495	500/495	313,4
0480009/495-490	495/490	311,9
0480009/490-485	490/485	310,4
0480009/485-480	485/480	309,0
0480009/480-475	480/475	307,5
0480009/475-470	475/470	306,0
0480009/470-465	470/465	304,5
0480009/465-460	465/460	303,0
0480009/460-455	460/455	301,5
0480009/455-450	455/450	300,0
0480009/450-445	450/445	298,5
0480009/445-440	445/440	297,0
0480009/440-435	440/435	295,5
0480009/435-430	435/430	294,1
0480009/430-425	430/425	292,6
0480009/425-420	425/420	291,1
0480009/420-415	420/415	289,6
0480009/415-410	415/410	288,1
0480009/410-405	410/405	286,6
0480009/405-400	405/400	285,1
0480009/400-395	400/395	283,6
0480009/395-390	395/390	282,1
0480009/390-385	390/385	280,6
0480009/385-380	385/380	279,2
0480009/380-375	380/375	277,7
0480009/375-370	375/370	276,2
0480009/370-365	370/365	274,7
0480009/365-360	365/360	273,2
0480009/360-355	360/355	271,7
0480009/355-350	355/350	270,2
0480009/350-345	350/345	268,7
0480009/345-340	345/340	267,2
0480009/340-335	340/335	265,7
0480009/335-330	335/330	264,2

1. Dimensions for reference
2. Delivery and packaging are carried out in accordance with the terms of the contract
3. The manufacturer reserves the right, without notice to the consumer, to make changes to the design of the products for improvement of their technological and operational parameters, which will not affect the quality and properties of the product
4. Deviation of the actual weight of the nominal can be up to 10%.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: ISO 2768 - C LINEAR: ANGULAR:		FINISH:		DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION		A-01	
						TITLE: Concrete Drain Channel Mega DN400 H610-330 with Cast Iron Grate E600					
						ARTICLE: A3					
						SCALE:1:10					
						SHEET 2 OF 2					

DRAWN	O. Dyka	SIGNATURE	DATE	31.05.2024							
CHK'D	V. Kysel'tsia										
APPV'D	I. Malynovskiy										
MFG											
Q.A											
						MATERIAL: Concrete, Cast Iron					
						WEIGHT: kg					